

This Page Is Inserted by IFW Operations  
and is not a part of the Official Record

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

**IMAGES ARE BEST AVAILABLE COPY.**

As rescanning documents *will not* correct images,  
please do not report the images to the  
Image Problem Mailbox.



## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<b>(51) International Patent Classification <sup>6</sup>:</b> <b>B05D 1/00, 1/20, G03G 7/00</b>	<b>A1</b>	<b>(11) International Publication Number:</b> <b>WO 98/45052</b> <b>(43) International Publication Date:</b> 15 October 1998 (15.10.98)
<b>(21) International Application Number:</b> PCT/US97/23813 <b>(22) International Filing Date:</b> 23 December 1997 (23.12.97)  <b>(30) Priority Data:</b> 08/826,571      4 April 1997 (04.04.97)      US  <b>(71) Applicant:</b> MINNESOTA MINING AND MANUFACTURING COMPANY [US/US]; 3M Center, P.O. Box 33427, Saint Paul, MN 55133-3427 (US).  <b>(72) Inventors:</b> BUTLER, Terri, L.; P.O. Box 33427, Saint Paul, MN 55133-3427 (US). BRETSCHER, Kathryn, R.; P.O. Box 33427, Saint Paul, MN 55133-3427 (US). BERENS, Mark, C.; P.O. Box 33427, Saint Paul, MN 55133-3427 (US). BAKER, James, A.; P.O. Box 33427, Saint Paul, MN 55133-3427 (US). LEHMAN, Gaye, K.; P.O. Box 33427, Saint Paul, MN 55133-3427 (US).  <b>(74) Agents:</b> HORNICKEL, John, H. et al.; Minnesota Mining and Manufacturing Company, Office of Intellectual Property Counsel, P.O. Box 33427, Saint Paul, MN 55133-3427 (US).		<b>(81) Designated States:</b> AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, GM, GW, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).  <b>Published</b> <i>With international search report.</i>
<b>(54) Title:</b> MODULATION OF COATING PATTERNS IN FLUID CARRIER COATING PROCESSES		
<b>(57) Abstract</b>		
<p>A method of modulating coating patterns is disclosed. The method uses the steps of dispensing a composite comprising a carrier fluid layer and a functional fluid layer from an orifice; contacting the composite with a substrate; transferring the composite to the substrate, wherein interfacial interaction among the carrier fluid layer, the functional fluid layer, and the substrate generates a patterned coating of the functional layer on the substrate. The coating patterns provide controlled release surfaces for tapes, image receptors, and the like.</p> <div data-bbox="730 1134 1429 1911" data-label="Image"> </div>		

## Modulation of Coating Patterns in Fluid Carrier Coating Processes

### 5 Field of Invention

This present invention relates to controlling the arrangement of release coatings on surfaces.

### Background of Invention

10 International Patent Publication WO 96/23595 (Melancon et al.) discloses a process, referred to as a carrier fluid process, for coating a composite layer onto a web. The composite layer comprises a carrier layer of fluid (such as water) and one or more functional layers (such as silicone or other polymeric materials). With subsequent removal of the carrier fluid layer, only the functional  
15 layer is left on the web. The advantage of this process is that it can be used to generate thin (i.e. less than 100 microns) and ultrathin coatings (i.e. less than 1 micron coatings) without solvent dilution.

U.S. Pat. No 5,061,535 (Kreckel, et al.) discloses the generation of geometric patterns by flexographic or gravure printing.

20 The coating art also employs "Langmuir-Blodgett" type bath coaters such as described by K. Blodgett in Journal of the American Chemical Society, vol. 57 1935, p. 1007 and U.S. Patent No. 4,093,757 (Barraud, et al 1978) and Japanese Patent Application 63-327260 (Masutani, et al 1990). In Langmuir bath coating, a functional layer, comprising a coating formulation is floated on the  
25 surface of a bath of water or another supportive (carrier) liquid and is then transferred to a substrate or web by dipping or rolling the substrate off of the bath surface.

Traditional methods of applying coatings to minimize coating defects are discussed in Cohen, E.D. and Gutoff, E.B., Modern Coating and Drying  
30 Technology, VCH Publishers, New York 1992 and Satas, D., Web Processing and Converting Technology and Equipment, Van Norstrand Reinhold Publishing Co., New York 1984.

### Summary of Invention

5 The apparatus and method of this invention coats patterned thin to ultra-thin liquid films onto substrates. The invention includes floating or supporting a coating or functional fluid(s) on a carrier fluid, this plurality of fluid layers forming a composite. A substrate and the composite are moved in relative motion to each other so as to effect contact.

10 Preferably, composite layer and substrate move at a rate relative to each other that is sufficiently high enough to form a continuous fluid bridge of composite layer across the coating width of the substrate.

The contact between the composite layer and substrate results in interposing the coating or functional layer between the substrate and the carrier fluid. The carrier fluid is at least partly removed by mechanical or evaporative means while leaving the coating fluid(s) on the substrate as a coating layer. By appropriate choice of functional layer(s), carrier fluid and coating conditions, consistent patterns can be formed in the functional layer which impart useful features. The functional layer can be cured by thermal or radiative means to generate a crosslinked patterned coating. Miscible and immiscible combinations of coating and carrier fluids may be used in the composite layer.

20 The invention as described above differs from the fluid carrier coating processes described in Melancon et al (WO 96/23595). As significant an improvement to the coating art that Melancon et al. is, nonetheless Melancon et al. do not specifically address issues related to various coating properties, such as homogeneity, surface coverage, patterning, optical clarity, and the like, important for the coating of release surfaces. The disclosure of the Melancon et al. coating process also does not address the utility of using coating patterns to modulate functional performance, e.g., release performance. Melancon et al. also does not disclose the use of a fluid carrier to generate these patterns.

Also, "Langmuir Blodgett" type coaters have not been used in a manner to generate coating patterns for the purpose of improving functional performance of the resulting coated surface.

5 In fact, conventional coating literature regards coatings exhibiting such patterns as potentially flawed or defective. Such coating defects are discussed in detail in E. Cohen and E. Guttoff, Modern Coating and Drying Technology (see for example pp. 79 - 85, 156 - 163 and 287 - 290).

One aspect of the present invention is a novel approach for generating, modulating and controlling patterns produced using the Melancon et al. carrier fluid coating process or the "Langmuir Blodgett" bath coating process. The  
10 method of making a patterned coating comprises the steps of (a) dispensing a composite comprising a carrier fluid layer and a functional fluid layer; (b) bringing the composite into contact with a substrate; (c) transferring the composite to the substrate, wherein interfacial interaction among the carrier fluid layer, the  
15 functional fluid layer, and the substrate generates a patterned coating of the functional layer on the substrate.

Preferably, these coating methods can be used to provide glossy smooth coatings, translucent patterned coatings, or porous coatings.

Another aspect of the present invention is an article comprising a  
20 patterned coating on a substrate, prepared according to the above method, wherein the article comprises a temporary electrographic image receptor, a release liner, a low-adhesion-backsize material, a differential release layer, a microporous membrane, an adhesive tape, a high diffusion gradient functional layer, a filter, or a porous substrate surface modifier. The temporary electrographic image receptor  
25 can be either an electrophotographic image receptor or an electrostatic image receptor.

Another aspect of the present invention is the use of a fluid carrier in carrier fluid coating and bath coating processes to obtain controlled patterns that have desirable performance properties. Preferably, the coating patterns can  
30 comprise either generation or attenuation from a uniform coating thickness previously used in the art.

“Pattern” means an inhomogeneous coating that varies in thickness, spacial resolution, and material composition across and down web in a random, symmetrical, or periodic fashion using any theory of geometry, including without limitation, Euclidian geometry and fractal geometry.

5                   A feature of the present invention is the ability to use known coating techniques in previously unknown manners to control the appearance, surface texture, pattern, and resulting coated surface properties of any substrate so coated.

                  Another feature of the present invention is the ability to generate patterns in ultra-thin liquid coatings.

10                  Another feature of the present invention is the ability to use silicone-based release compositions in the modulated coating processes in order to provide controlled release surface patterns (on a microscopic or macroscopic scale) for use with a variety of materials that benefit from temporary contact with such patterned controlled release surfaces.

15                  Another feature of the present invention is the ability to apply a variety of processing parameters to control (i.e., random variation, gradual variation, periodic variation, etc.) how a release surface is constructed for further industrial use.

                  Another feature of the present invention is the ability to generate  
20                  patterned coatings from 100% solids formulations, i.e. without solvent dilution thereby avoid environmental pollution and other hazards and costs associated therewith.

                  Another feature of the invention is the ability to generate and control unique patterns without additional machine costs, as one might incur from  
25                  tooling gravure rolls.

                  Another feature is the ability to make rough surfaces without tooling or additives.

                  Another feature is the ability to modulate peel force in tightly crosslinked coatings by varying coating parameters (as opposed to formulation and  
30                  additives).

An advantage of the present invention is the versatility of using advanced known coating techniques in unexpected ways to accomplish the surprising results of producing release surfaces with precise patterns.

Another advantage of the present invention is the use of patterned  
5 release surfaces on temporary image receptors.

Further features and advantages of the invention are apparent from a description of embodiments of the invention in conjunction with the following drawings.

#### 10 Brief Description of Drawings

Fig. 1 is comprised of Figs. 1A, 1B, 1C, and 1D and are photomicrographs of coatings of the present invention in an experiment that varies coating thicknesses of 10,600, 5300, 2650, and 1325 Å, respectively, while maintaining constant viscosity of the coating composition.

15 Fig. 2 is comprised of Figs. 2A and 2B and are photomicrographs of coatings of the present invention in an experiment that varies viscosities of the coating composition of 500 and 30,000 mPas, respectively, while maintaining constant coating thickness.

20

#### Embodiments of Invention

##### Functional Layer Composition

As used in the present invention, nonlimiting examples of  
25 functional layers include monomers, oligomers, solutions of dissolved solids, solid-fluid dispersions, fluid mixtures, and emulsions. Such fluids are useful in producing a wide range of functional coatings on webs including release coatings, low adhesion coatings, priming layers, adhesive coatings, protective coatings, optically active coatings, and chemically active coatings.

30 Coatings made by this invention can have utility in manufacturing products such as release liners, pressure-sensitive tapes, photographic film,

electrographic printing media, magnetic recording tapes, gas separation.

membranes, reflective sheeting and signing, medical dressings, coated abrasives, printing plates, membranes and films. Functional coating fluids may be miscible or immiscible with the carrier fluid. Preferably, the functional fluid layer is

- 5 selected from the group consisting of a release material, an adhesive, a primer, and a low adhesive backsize material.

Preferred functional layer formulations include silicone-urea release formulations (as disclosed in U.S. Pat. No. 5,045,391 (Brandt et al.)); and silicone or fluorosilicone polymers (such as ethylenically unsaturated-, hydroxy-, epoxy-terminated or pendant functional silicone and fluorosilicone pre-polymers); or  
10 other release polymers with suitable low surface energy (such as poly(organosiloxanes), fluoropolymers, and the like) as disclosed in PCT Publication WO 97/12282. The mole percent of crosslinkable groups is preferably about 0 to 20 mole%, more preferably about 0 - 15 mole percent, and most  
15 preferably about 0 - 10 mole percent. For addition cure systems, both vinyl and alkenyl (number of carbons greater than 2 and less than 10) crosslinking groups may be used. The distribution of crosslinks may be mono-, bi-, or multimodal, especially in the presence of higher molecular weight silicone gums as additives.

More preferably, functional layers are selected from the group  
20 consisting of ethylenically unsaturated-terminated and/or pendant silicone pre-polymers, silicone-urea polymers, and epoxy functional silicones and fluoropolymers disclosed above.

Preferably the silicone, fluorosilicone and fluoropolymer functional layer pre-polymers have a number average molecular weight ranging from 2,000 -  
25 60,000 Da and 0 - 30,000 mPas, i.e. suitable for solventless coating. Additionally, solvent can be used to dissolve higher molecular weight silicone and fluorosilicone pre-polymers. More preferably, the functional layer pre-polymers have number average molecular weights of 10,000 - 30,000 Da with viscosities of 200 - 20,000 mPas.

30



### Crosslinkers and Cure Catalysts for Addition Cure Functional

#### Layers

The pattern may be permanently retained in the functional layer by crosslinking using thermal and radiation cure (Infra red, ultraviolet or visible light and sources of scintillating radioactivity such as electron beams, gamma ray sources and the like) systems. For addition cure silicone pre-polymers, a nonlimiting list of silyl hydride crosslinkers include Dow Corning as homopolymers (Syl-Off™ 7048), copolymers (Syl-Off™ 7678) and mixtures (Syl-Off™ 7488). Crosslinker in the amounts corresponding to 1:1 to 10:1 silyl hydride:vinyl ratio was used with an appropriate amount of an inhibitor such as a 70:30 ratio of fumarate in benzyl alcohol to achieve good cure and adequate pot life in 100% solids coating dispersion with a thermal catalyst.

For addition cure silicone functional layer polymers, both thermal and ultraviolet ("UV") initiated platinum catalysts can be used in the formation of release surfaces of the present invention. Nonlimiting examples of platinum thermal catalysts are Dow Corning (Midland, MI) Sylloff 4000 and Gelest (Tullytown, PA) platinum-divinyltetramethyldisiloxane complex (SIP6830.0 and SIP6831.0). A nonlimiting example of a platinum UV catalyst is disclosed given by in U.S. Pat. No. 4,510,094 (Drahnak). Unlike the thermal catalyst, the UV catalyst does not require an additional inhibitor since the complex is effectively inhibited until exposure to UV.

#### Chemical Modifiers

Chemical additives or modifiers can be added to the functional layer composition. These chemical additives may include higher molecular weight gums, particulate fillers, silicate resins, surface active agents, particulate fillers, etc.

Nonlimiting examples of silicone gums include vinyl functional gums ranging in molecular weights from 30,000 to 800,000 Da available from Gelest (DMS-41, DMS-46, DMS-52) and ethylenically unsaturated organopolysiloxane compositions prepared according to U.S. Pat. No. 5,468,815 and 5,520,978 (Boardman) and in European Patent Publication 0 559 575 A1.

Preferably, the alkenyl-functional silicones have 2 to 10 carbon atoms with a molecular weight of approximately 440,000 Da. When silicone compositions were used as additives to low viscosity silicone pre-polymers in 100% solids formulations, their molecular weight was preferably less than 800,000 Da, more preferably less than 600,000 Da, and most preferably less than 500,000 Da. Their concentration was preferably less than 20% (w/w) in the silicone pre-polymer, more preferably less than 10% (w/w) and most preferably less than 5% w/w.

A nonlimiting list of fillers include hydrophobic fumed silica such as CAB-O-SIL™ TS-530, TS-610 and TS-720 (all from Cabot Corp. of Billerica, MA) and AER-O-SIL™ R812, R812S, R972, R202 (from Degussa Corp. of Ridgfield Park, NJ). A non-limiting list of low surface energy fillers includes polymethylmethacrylate beads, polystyrene beads, silicone rubber particles, teflon particles, and acrylic particles. Other particulate fillers which can be used but which are higher surface energy include but are not limited to silica (not hydrophobically modified), titanium dioxide, zinc oxide, iron oxide, alumina, vanadium pentoxide, indium oxide, tin oxide, and antimony doped tin oxide. High surface energy particles that have been treated to lower the surface energy are also useful. The preferred inorganic particles include fumed, precipitated or finely divided silicas.

More preferred inorganic particles include colloidal silicas known under the tradenames of CAB-O-SIL™ (available from Cabot Corp.) and AEROSIL™ (available from Degussa). Hydrophobically treated colloidal silica, such as CAB-O-SIL™ TS-530, TS-610 and TS-720 (all from Cabot Corp. of Billerica, MA), are preferred. CAB-O-SIL™ TS-530 is a high purity hydrophobic fumed silica which has been treated with hexamethyldisilazane (HMDZ). CAB-O-SIL™ TS-610 is a high purity hydrophobic fumed silica treated with dichlorodimethyl silane. CAB-O-SIL™ TS-720 is a high purity hydrophobic fumed silica treated with a dimethyl silicone fluid. The treatment replaces many of the surface hydroxyl groups on the fumed silica with a polydimethyl siloxane polymer. The treatment

replaces many of the hydroxyl groups on the fumed silica with trimethylsilyl groups. As a result the silica is a low surface energy particle.

Most preferably the filler is a hydrophobically modified fumed silica treated in situ with HMDZ to chemically bind the silica to the pre-polymer, available from Nusil Corporation (Carpinteria, CA). The composition of the hydrophobic filler is preferably 0.1 to 20%, more preferably 0.5 to 10% most preferably 1 to 5% w/w.

A non-limiting list of silicate resins include Dow Corning 7615, Gelest vinyl Q resin VQM-135 and VQM-146 which are provided as dispersions of silicate in silicone. Preferably, the silicate resin is present at 5 to 100% w/w in the silicone pre-polymer, more preferably 0 to 75%, most preferably 0 to 50% (w/w).

A nonlimiting list of surface active agents include low molecular weight acrylate based surfactants such as Modaflow (Monsanto, St. Louis, MO) and BYK-358 (BYK-Chemie), silicone-functional surfactants such as Silwets (OSI), and fluorochemical surfactants such as Fluorads (3M, St. Paul, MN) and Zonyl (Dupont, Wilimington, DE) leveling agents.

#### Thickness

The mean thickness of the functional layer is preferably about 0.005 to 100 microns, more preferably about 0.01 to 25 microns and most preferably about 0.1 to 5 microns.

#### Substrate

The substrate can be a continuous web, discrete sheets or rigid piece parts, or an array of pieces or parts transported through the coating. Nonlimiting examples of substrates include opaque, translucent, and clear substrates; low surface energy and high surface energy substrates; textured, patterned, rough, and smooth substrates; and combinations thereof. Preferred continuous webs include transparent, translucent or opaque materials of low to high surface energy. More preferably the substrate may include polyethylene terephthalate, polycarbonate, polystyrene, and an inverted dual layer photoreceptor as described in Example 6 of

PCT Patent Publication WO 96/34318. Most preferably, the substrate is clear polyester.

Dispensing of the Composite of Carrier Fluid Layer and Functional Fluid Layer

5 Nonlimiting examples of dispensing of the composite of carrier fluid and functional fluid include dip coating, bath coating, carrier fluid coating, multilayer curtain coating, multilayer extrusion die coating, roll coating, spray coating and drip coating. Of these coating methods, carrier fluid coating and bath coating are preferred.

10

Carrier Fluid Coating Process Parameters

International Patent Publication WO 96/23595 (Melancon et al.) discloses the general parameters for use of a carrier layer of fluid (such as water) to transport a functional layer (such as silicone or other polymeric material) to a web.

15 A preferred method is curtain coating of the composite layer.

As used in the present invention, carrier layers are preferably water and non-aqueous but water miscible liquids, more preferably water, salt solutions, and aqueous surfactant solutions, and most preferably tap water. The concentration of water in the carrier layer is preferably about 0 to 100%, more preferably about

20 50 to 100%, most preferably greater than 99% (w/w).

While Melancon et al. describe general processing parameters, the following parameters are important to an understanding of the scope of the present invention.

The web speed of the continuous process is preferably about 0 to  
25 5000 m/min, more preferably about 2 to 1000 m/min, and most preferably about 10 to 300 m/min.

The curtain height is preferably about 0 to 30 cm, more preferably about 1 to 15 cm, most preferably about 2 to 5 cm. The angle of the curtain  
30 relative to the substrate is preferably about 0 to 90 degrees, more preferably about 20 to 60 degree, more preferably about 40 to 50 degrees.

Surface coverage of the pattern is preferably about 0.1 to 99% of the surface area, more preferably about 5 to 99% of the surface area, and most preferably 20 to 99% of the surface area.

- 5                   Patterning can form in a variety of geometric patterns based on control of other parameters discussed herein. For example, control of fluid flow can alter patterns in a regular fashion, leading to a Euclidean geometric pattern.

Optical clarity is preferably clear to opaque, depending on the use of the coating.

- 10                   The variation of thicknesses across surface area at the microscopic level is preferably about 0 to 10 microns, more preferably about 0 to 5 microns, most preferably about 0 to 2 microns.

- Drying patterns (for example, Benard cells) may also be used to generate surface textures on release surfaces. However, the mechanism of this invention is by a different means. The mechanism of drying pattern formation either by density gradients caused by temperature gradients in a coating or by surface tension gradients is described in E. Cohen and E. Gutoff, "Modern Coating and Drying Technology," (VCH Press: NY, 1992), pp. 132-94 and Velarde and Normand, "Convection," Scientific American, 243, 92 (1980).
- 15                   For wet coating thicknesses less than 1 mm, convection cells are almost always driven by surface tension. The formation of surface tension driven convection patterns (Benard cells) is predicted by the magnitude of the Marangoni Number:
- 20

$$25 \quad \text{Ma} = \frac{(\text{d}\sigma/\text{d}T)(\text{d}T/\text{d}y)h^2}{\eta [k\rho/C_p]}$$

- where  $(\text{d}\sigma/\text{d}T)$  is variation of coating fluid surface tension with temperature,  $(\text{d}T/\text{d}y)$  is the temperature variation across the thickness of the wet coating,  $h$  is the wet coating film thickness,  $\eta$  is the shear viscosity of the coating fluid,  $k$  is the thermal conductivity of the coating fluid,  $\rho$  is the density of the coating fluid and  $C_p$  is the liquid heat capacity at constant pressure of the coating fluid.
- 30

For thick coatings (i.e. wet film thickness  $> 1$  mm), surface tension driven instabilities will occur for  $Ma > 80$ ; however, Cohen and Gutoff note that critical Marangoni Number will be lower for thinner coatings. Marangoni instabilities will thus be enhanced by increasing the surface tension gradient with temperature ( $d\sigma/dT$ ), the temperature gradient with wet coating thickness ( $dT/dy$ ), and the wet film thickness ( $h$ ). Similarly, Marangoni instabilities will be decreased by increasing fluid viscosity ( $\eta$ ), increasing fluid thermal conductivity ( $k$ ), increasing fluid density ( $\rho$ ) or decreasing fluid heat capacity ( $C_p$ ).

This invention extends beyond the present art by relying on the presence of three components that contribute to the creation of patterning of the coating on the substrate: the functional layer of the coating, the carrier layer of the coating, and the substrate on which the layers contact. The ability of the two layers of the coating to generate patterns prior to the evaporation or other removal of the carrier layer is a feature of the present invention. Only when both the functional layer and the carrier layer are in contact with the substrate does the possibility of interfacial interaction among the two layers and the substrate occur. This interfacial interaction contributes to the formation of the patterning of the functional layer on the substrate.

#### Bath Coating Process

Functional layers include the same layers as the carrier fluid coating process, described above and Melancon WO 96/23595.

The bath can use the same liquids as a carrier layer in the carrier fluid coating process, as described above and in Melancon WO 96/23595.

The following parameters are important to an understanding of the scope of the present invention.

The web speed of continuous process is preferably about 0 to 5000 m/min, more preferably about 2 to 200 m/min, and most preferably about 10 to 30 m/min.

The variation of thicknesses across surface area at microscopic level is preferably about 0 to 10 microns, more preferably about 0 to 5 microns, most preferably about 0 to 2 microns.

Patterns produced according to the method of the present invention include those having inhomogeneity in thickness, spacial resolution and maerial composition, and combinations thereof across and down a substrate during the transferring step to the substrate. Variation in the pattern can be selected from the group consisting of random, symmetrical, periodic, gradual, irregular, circular, angular, non-angular, and combinations thereof. Further the patten can result in characteristics such as a matte finish, optical transmittance, roughness, porosity, image quality, controlled release, partial coating, and combinations thereof.

Regardless of the type of coating process employed, the invention optionally comprises a further step of removing the carrier fluid from the substrate. Nonlimiting examples of method to remove carrier fluid include mechanical doctoring, gravity, centripetal removal, blowing, suction, solidification of carrier and doctoring, absorption into an absorptive material, gelation of carrier and doctoring, gelation of coating and doctoring, adsorption of carrier fluid, and evaporation.

Regardless of the type of coating process employed, the invention optionally comprises a further step of post-processing a functional fluid layer on the substrate. Nonlimiting examples of post-processing include drying to retain the pattern already formed in step (c), crosslinking, and separating the patterned coating from the substrate, and combinations thereof.

#### Usefulness of the Invention

The processes of the present invention can be used to formulate premium release surfaces by modulating the release characteristics. It can also be used to alter the optical clarity of a coating, i.e. from a glossy to translucent appearance. In another application, this coating process can be used to generate a porous, polymeric membrane.

Modulation of coating patterns is useful for controlling release characteristics, optical clarity or porosity of coatings. Translucent or matte release surfaces (such as the translucent coatings generated here) can also be useful to reduce the appearance of defects in release coatings used for tapes. Patterned release surfaces may be used to control peel forces, allowing the coating method (rather than the chemistry) to be used to "fine tune" the release properties for specific applications. Patterned release coatings may be useful for medical tapes, where the pattern may modulate the characteristics of the peel from skin or other tissue. Patterned coatings may also be used to control the relative barrier and permeability characteristics of coatings. Moisture vapor permeability (MVT) may be affected, and thus this process may find application in medical tapes that require high MVT. Porous membranes and patterned films may be generated by this technique, and may find utility in controlling flow of liquids and gases.

These patterning processes can be used with 100% solids formulations, which are more environmentally benign. These patterns can be applied at coating thicknesses ranging from about 0.005 to 1000 microns. The methods of pattern generation have the advantage of bearing minimal tooling cost for changing and controlling patterns.

These methods of generating patterned surface release layers are also useful as elements of temporary receptors, as would be used for electrography, particularly electrophotographic and electrostatic printing.

Further embodiments and uses are described the following examples.

## Examples

### Raw Materials

The raw materials used consisted of curable and non-curable silicones and fluorosilicones. Addition curable, ethylenically unsaturated silicones were prepared by methods known in the art (including U.S. Patent No. 4,609,574) and commercially obtained from Dow Corning (Syl-Off 7240; Midland, Michigan), Gelest (VDT-731; Tullytown, Pennsylvania), United



Chemical Technologies, Inc. (PS444 and PS445; Bristol, PA), and Nusil Technologies (PLY7500; Carpinteria, CA).

Release materials included base silicone or fluorosilicone addition cured pre-polymers in combination with homopolymer and/or copolymer hydride cross linkers. These pre-polymers represented a range of potential crosslinking density, afforded by the presence or absence of pendant crosslinkable groups in addition to crosslinkable endcapping groups as well as a range of (low) molecular weights, thus enabling low viscosity solventless coating formulations. The mole percent of crosslinkable groups varied between 1 - 10% in the pre-polymer. Both vinyl and alkenyl crosslinking groups were used. The molecular weights of the pre-polymers ranged from approximately 10,000-30,000 Da, with the lower molecular weights corresponding to useful viscosity ranges for solventless coating methods and yielding a higher effective cross link density.

Other functional silicones and fluorosilicones were also used, including epoxy functional silicone GE UV9300 (General Electric Company, Waterford, NY) and mixed epoxy functional silicones (MES) prepared according to Example 1 in Kessel and Nelson in U.S. Patent No. 5,332,797. In addition, non-crosslinkable polydimethylsiloxane viscosity standards (Brookfield Engineering Laboratories, Stoughton, MA) were also used. Silicone pre-polymers were also used in the absence of crosslinker and cure systems. Silicones and fluorosilicones varied in molecular weight from 10,000 - 30,000 Da, corresponding to useful viscosity ranges for solventless coating methods (i.e. 1 - 30,000 mPas).

Table 1 summarizes some of the materials used, together with their equivalent weights.

Both thermal and ultra-violet ("UV") initiated platinum catalysts were used. Examples of platinum thermal catalysts are Dow Corning (Midland, MI) Syl-Off 4000 and Gelest (Tullytown, PA) platinum-divinyltetramethyldisiloxane complex (SIP 6830.0 and 6831.0). An appropriate amount of a 70:30 mixture by weight of diethyl fumarate and benzyl alcohol (FBA) can be added as an inhibitor or bath life extender as taught in U.S. Patent No.s 4,774,111 and 5,036,117. A platinum UV catalyst was also used and was

prepared as described in L.D. Boardman, Organometallics, 1992, 11, 4194 - 4201 and in U.S. Patents 4,510,094 and 4,600,484 (Drahnak).

Silyl hydride cross linkers were obtained from Dow Corning as homopolymers (Syl-Off7048), copolymers (Syl-Off7678) and a 1:1 mixture (Syl-Off7488).

Crosslinker in the amount corresponding to 1.3:1 to 5:1 silyl hydride:vinyl ratio was used in combination with 2.40% w/w FBA in the base pre-polymer to achieve good cure and adequate pot life in 100% solids formulations. In other experiments, the formulation contained only the silicone pre-polymer, and did not include crosslinker or cure system.

Additives were used in these formulations, including hydrophobic silica (CAB-O-SIL™ TS-530 and TS-720 (all from Cabot Corp. of Billerica, MA) and hexamethyldisilazane in-situ treated silica in silicone (from Nusil of Carpinteria, CA). A coefficient of friction modifying, high molecular weight silicone gum was prepared according to the methods described in Boardman et al. U.S. Patent No.s. 5,520,978 and 5,468,815 and was also used in some formulations. Surface active agents (SAA) included Fluorad FC431 (3M of St. Paul, MN), Silwet L77 (OSI Specialties, Inc. of Danbury, CT), Modaflow III and Modaflow 2100 (Monsanto Corp. of St. Louis, MO) and BYK-358 (BYK-Gardner of Columbia, MD). Heptane was added to some samples to investigate the effect of viscosity and surface tension.

For the solventless coating formulations, Stock A contained the base silicone, gum, platinum catalyst, and a fumarate inhibitor. A fully reactive system was prepared just prior to coating by the addition of Stock B (containing the cross linker). Examples of these formulations are described in Table 2 for ethylenically unsaturated addition cure polymers. Similar formulations were prepared for vinyl functional base polymers.

#### Table 1: Summary of Material Set

Component	Description (crosslinking functionality)	mole% vinyl	Viscosity (mPas)	MW <sup>1</sup> (g/mol)
<b>PRE-POLYMERS</b>				
I	hexenyl pendant and endblocked	2.67	450	9600
II	hexenyl endblocked only	1	450	12400

**Table 2: Example Preparation of Stocks A and B for Solventless Release Formulations**

5

Components	Final Concentration (relative to base polymer)	Amount (g)
<b>Stock A</b>		
Base silicone I	--	833.25
Syl-Off Syloff 4000 Pt thermal catalyst	0.52% w/w	19.83
FBA Inhibitor	2.4% w/w	19.80
<b>Stock B</b>		
Crosslinker Syl-Off 7048	5:1 Silyl hydride:vinyl	135.12

### Coating Methods

10 Coating substrates included 12" (38 cm) wide clear polyester film, aluminized PET, and an inverted dual layer photoconductor with barrier layer (the formulation of which has been described in PCT Publication No. WO 96/34318 Example 6.

### Carrier Fluid Coating Process

15 A two layer slide die was used, as described in International Patent Publication WO 96/23595. Silicone flowed from the top slot, which had a 0.254

---

<sup>1</sup> Approximate molecular weight calculated from degree of polymerization (dp).

mm gap. Water flowed through the bottom slot, which had a 0.508 mm gap. Both slots were 248 mm wide. Municipal tap water was used as the carrier layer. The water flow rate out of the bottom die slot varied between 2.2 to 2.8 L/min (corresponding to pump rates of 21 to 22.6 rpm). The typical water temperature was 10 to 13 degrees C; except during experiments specifically designed to test the effect of higher water temperature. In these cases the water temperature was varied in a range from 10 to 66 degrees C. The thickness of the coating was controlled by varying the syringe pump rate (which metered the release formulation into the die) or by changing the web speed. Coating thickness was varied between 0.1 - 2 microns. Typical web speeds were 3 - 30 m/min. Typical syringe pump rates ranged from 1 to 5 milliliters per minute.

#### Langmuir Blodgett Bath Coating Process

Langmuir Blodgett Bath coating was also used. A functional layer such as silicone was applied to the surface of a water bath and drawn up onto a moving web as the web kissed the bath surface via a coating roll. The effect of temperature on this process was studied by examining the coating characteristics resulting when the bath was filled with cold water (10 degrees C) or hot water (50 degrees C).

#### Conventional Gravure Coating Process

Direct, forward offset, and reverse offset gravure methods were also used to coat samples. These methods were used to achieve a coating thickness in the target range of 0.3 - 2 microns for comparison to the water carrier-based processes of carrier fluid coating process and bath coating. Experiments were done on two different coating lines, one with a 3 m infrared oven and the other with a 3 m air floatation dryer. Gravure rolls with pyramidal cells having volume factors of 3 - 7.7 cubic billion microns were used. Web speeds were 3, 15 and 30 meters per minute (m/min). Gravure roll speeds were varied from 1 to 13.6 m/min. Gravure roll speeds were adjusted to thicken or thin a coating depending on feedback from an on-line UV gauge.

## Test methods

### Coating thickness

The coating thickness in the gravure experiments was measured using an on-line UV gauge in a manner as disclosed in U.S. Pat. No. 3,956,630; 5 U.S. Pat. No. 4,250,382; U.S. Pat. No. 4,978,731; and U.S. Pat. No. 4,922,113. A UV dye was mixed into the coating in a 1% (w/w) concentration. The dye in the coating was excited by UV light and the signal it emitted was proportional to coating thickness. An on-line calibration curve was generated by running the web line at a known speed and using a syringe pump to meter a known coating volume 10 onto the web under a spreading bar. The relationship of fluorescence intensity to coating was linear in the range of interest (i.e. from 0.1 - 1 micron).

### Optical Microscopy

A Zeiss Axioskope microscope was used to examine coatings using 15 a magnification of 50 x with a differential interference contrast lens with both reflected and transmitted light. Images were recorded with a Polaroid camera on black and white film.

## Experimental Results

### Example 1

Example 1 illustrates the nature of the patterns generated by a fluid carrier coating process. The fluid carrier coating process was used to coat a functional layer of ethylenically unsaturated silicone I onto polyethylene terephthalate (i.e., polyester) substrate using water as the fluid carrier. As shown 25 in Figure 1 and Example 1.1 (Table 3), prominent and consistent patterns were seen on the substrate that vary in dimension with the thickness of the functional layer. These patterns were observed after the coater, but before the oven where the coatings were heat cured. These coatings could be crosslinked to preserve the pattern. At a coating thickness of approximately 1.1 microns, the coating was 30 shown to exhibit a prominent orange peel texture, as shown in Fig. 1A. This

texture became finer as the coating thickness was reduced, showing smaller, more circular holes at 0.52 and 0.26 microns (Figs. 1B and 1C, respectively). At coating weights corresponding to 0.13 microns (Fig. 1D), the pattern was almost indiscernible by eye; the marked characteristic of the coating was its translucent or matte finish (as opposed to glossiness).

The functional layer I (as described in Table 1) was coated onto polyester substrate using a Langmuir bath coater and direct gravure. Again, the formulation I consisted of a 100% solids formulation. Web speed and gravure roll ratios and cell patterns were chosen such that the thickness of the resulting functional layer was comparable in the three coating methods, i.e., at 0.5 microns. The coating patterns are described in Table 3. When a Langmuir bath coater was used with water as the carrier fluid, similar small round "pinhole" patterns were found in the functional layer as when the fluid carrier coating process was used (Figure 1B and Examples 1.1 and 1.2). In contrast, as shown in Example 1.3, when gravure was used with the same 100% solids formulation and polyester substrate, but with no water (or fluid carrier layer) present, no pinhole patterns were seen. Rather, the gravure pattern was evident.

Table 3: Comparison of Coating Patterns Generated by Carrier Fluid Coater, Bath Coater and Gravure

Ex	Coating Method	Viscosity (mPas)	Functional pump rate (mL/min)	Web speed (m/min)	Thickness (microns)	Temp (C)	Coating Quality
1.1	Carrier Fluid Method	450	1.0	7.6	0.52	10	isolated pinholes cover the web (orange peel); water forms pearls down center of web

Ex	Coating Method	Viscosity (mPas)	Functional pump rate (mL/min)	Web speed (m/min)	Thickness (microns)	Temp (C)	Coating Quality
1.2	Bath Coater	450	1.0	7.6	0.52	10	round "pinhole" pattern similar to Carrier Fluid Coating method
1.3	Direct Gravure	450	NA	15.2	0.6	21	some downweb and rubber roll marks; very good coating quality; gravure pattern seen

The absence of similar patterns with the gravure process supports the concept that the orange peel or circular patterns are not due only to an interaction between the coating material and the substrate. The presence of the fluid carrier is critical to pattern generation. While not wishing to be bound by any particular theory, it is believed that the interaction of the substrate, fluid carrier, and functional layer is essential for pattern generation.

### Example 2

Example 2 in Table 4 illustrates that fluid carrier coating methods can be used to generate and control patterns for silicone functional layers possessing different molecular weights, viscosities and crosslinking functionality. As shown in Table 4, within each silicone series, thinner coatings show finer patterns. Surface patterns of silicones possessing local high energy functional groups, such as the epoxy silicones (Examples 2.1 - 2.8), show finer patterns or more translucent coating (less obvious orange peel) at similar coating thicknesses compared to alkenyl functional silicones (Examples 2.9 - 2.20).

As shown in Table 4, higher viscosity silicones (corresponding to higher molecular weights) correspond to finer patterns at similar coating weights.

This is seen readily in Example 2.20 (10,000 mPas) compared to Example 2.10 (450 mPas). As shown in Example 2.21, solvent can be added to the formulation to change patterning behavior.



Table 4: Effect of Silicone Functionality on Carrier Fluid Coating Process Coating Patterns at Varying Formulation Viscosities and Coating

Ex	Functional Layer	Viscosity (mPas)	Functional pump rate (mL/min)	Water Flow Rate (L/min)	Web speed (m/min)	Thicknesses		Coating Quality
						Thickness (microns)	Temp (C)	
2.1	GE UV 9300	230	1.0	2.6	3.8	1.1	10	shiny, tiny dots on the web
2.2	GE UV 9300	230	1.0	2.6	7.6	0.52	10	more dots on the web
2.3	GE UV 9300	230	1.0	2.6	15.3	0.26	10	many more dots than 2.2; translucent; irregular wetting patterns are apparent
2.4	GE UV 9300	230	1.0	2.6	30.5	0.13	10	coating is very translucent
2.5	MES	300	1.0	2.6	3.8	1.1	10	shiny, tiny dots on the web
2.6	MES	300	1.0	2.6	7.6	0.52	10	more dots on the web
2.7	MES	300	1.0	2.6	15.3	0.26	10	many more dots; translucent
2.8	MES	300	1.0	2.6	30.5	0.13	10	coating is very translucent in appearance

Ex	Functional Layer	Viscosity (mPas)	Functional pump rate (mL/min)	Water Flow Rate (L/min)	Web speed (m/min)	Thickness (microns)	Temp (C)	Coating Quality
2.9	I	450	1.0	2.6	3.8	1.1	10	prominent fishnet or orange peel pattern with large circular holes and dewetting patterns
2.10	I	450	1.0	2.6	7.6	0.52	10	orange peel effect
2.11	I	450	1.0	2.6	15.3	0.26	10	finer scale orange peel than 2.10 -- but still prominent
2.12	I	450	1.0	2.6	30.5	0.13	10	fine dewetting pattern or holes, translucent, looks like epoxy silicones
2.13	Nusil PLY 7500	1000	1.0	2.6	3.8	1.13	10	prominent orange peel
2.14	Nusil PLY 7500	1000	1.0	2.6	7.6	0.52	10	finer but obvious orange peel
2.15	Nusil PLY 7500	1000	1.0	2.6	15.3	0.26	10	very fine orange peel
2.16	Hulls PS444	5000	1.0	2.6	3.8	1.13	10	tiny holes visible to the eye

Ex	Functional Layer	Viscosity (mPas)	Functional pump rate (mL/min)	Water Flow Rate (L/min)	Web speed (m/min)	Thickness (microns)	Temp (C)	Coating Quality
2.17	Huls PS444	5000	1.0	2.6	7.6	0.52	10	tiny holes in a dense pattern and no water dewetting streaks
2.18	Huls PS444	5000	1.0	2.6	15.3	0.26	10	very grainy texture, tiny densely packed holes; slight water droplet dewetting patterns
2.19	Huls PS445	10,000	1.0	2.6	3.8	1.1	10	tiny holes and a speckled web (but fewer than 2.18)
2.20	Huls PS445	10,000	1.0	2.6	7.6	0.52	10	very tiny, readily discernable dots; grainy
2.21	1 and heptane (1:1)	<<450	2.0	2.6	7.6	0.52	10	orange peel, many water patterns on the web, dewetted areas

## Example 3

Example 3 in Table 5 and Figure 2 further illustrate the effect of functional layer viscosity on pattern generation with a fluid carrier coating method. The effect of viscosity was examined using polydimethylsiloxane viscosity standards,  
5 purchased from Brookfield. As shown in Figure 2a, prominent orange peel was seen with a 500 mPas silicone, similar to that shown in Figure 1b for the similar viscosity alkenyl functional silicone (I). At higher viscosities, such as 30,000 mPas in Figure 2b, the coating was glossy with only very tiny circular patterns, generating a translucent or matte finish. However, downweb ribbing patterns  
10 were apparent in the coating. Additional results are shown in Examples 3.1 to 3.12 for a series of viscosity standards (480 - 30,000 mPas) coated at thicknesses ranging from 0.26 to 1.1 microns. Example 3 demonstrates that for a homologous series of functional layer polymers, patterns can be controlled through appropriate choice of viscosity and coating weight. Patterns can be  
15 modulated to achieve glossy, translucent (or matte finish), or porous coatings. In contrast to gravure coating, no retooling costs are required for pattern control.

**Table 5: Effect of Coating Thickness and Viscosity on Modulating the Release Coating Pattern Characteristics Generated by Carrier Fluid Coating**

Example	Viscosity (mPas)	Functional pump rate (mL/min)	Water Flow Rate (L/min)	Web speed (m/min)	Thickness (microns)	Temp (C)	Coating Quality
3.1	480	1.0	2.6	3.8	1.1	10	large circular craters and dewetting patterns; translucent
3.2	480	1.0	2.6	7.6	0.52	10	finer circular craters and dewetting patterns that Ex. 1.1; translucent
3.3	480	1.0	2.6	15.3	0.26	10	finer circular craters and dewetting patterns than 3.2 -- still very visible
3.4	1000	1.0	2.6	3.8	1.1	10	large, obvious dewetted areas
3.5	1000	1.0	2.6	7.6	0.52	10	shiny coating with tiny holes; these did not dewet to form craters
3.6	1000	1.0	2.6	15.3	0.26	10	many tiny holes; coating is translucent

Example	Viscosity (mPas)	Functional pump rate (mL/min)	Water Flow Rate (L/min)	Web speed (m/min)	Thickness (microns)	Temp (C)	Coating Quality
3.7	11,800	1.0	2.6	7.6	0.52	10	shiny coating with very tiny holes that are visible under a microscope
3.8	11,800	1.0	2.6	15.3	0.26	10	more tiny holes in coating
3.9	11,800	1.0	2.6	24.4	0.16	10	many tiny holes in coating
3.10	30,000	1.0	2.6	3.8	1.1	10	tiny holes are visible only as dots to the eye; difficult to get good crossweb distribution with this viscosity
3.11	30,000	1.0	2.6	7.6	0.52	10	shiny coating; very tiny holes, downweb interference patterns (stripes)
3.12	30,000	1.0	2.6	15.3	0.26	10	shiny coating, very tiny holes in somewhat greater number than 4.11

Example 4

Example 4 illustrates the effect of altering the surface tension gradient between the water and the silicone by adding surface active agents (SAA's) to the silicone phase. SAA's can also be used in the fluid carrier.

Table 6: Effect of Surface Tension Modifiers and Leveling Agents on Patterned Release Surfaces Generated by Fluid Carrier

## Coating Process

Ex	SAA	Viscosity (mPas)	Functional pump rate (mL/min)	Water Flow Rate (L/min)	Web speed (m/min)	Thickness (microns)	Temp (C)	Coating Quality
4.1	II + 1% Silwet L77	450	1.0	2.6	7.6	0.52	10	shows exaggerated patterns
4.2	II + 0.5% Fluorad FC- 431	450	1.0	2.6	7.6	0.52	10	shows exaggerated patterns
4.3	I + 0.5% Modaflow resin	450	1.0	2.6	7.6	0.52	10	reduced patterns; showed brushstroke patterns



Ex	SAA	Viscosity (mPas)	Functional pump rate (mL/min)	Water Flow Rate (L/min)	Web speed (m/min)	Thickness (microns)	Temp (C)	Coating Quality
4.4	I + 0.25% Modaflow 2100	450	1.0	2.6	7.6	0.52	10	rough microtexture; no round holes but dewetting marks and translucent coating
4.5	I + 1.0% Modaflow 2100	450	1.0	2.6	7.6	0.52	10	translucent, irregular wetting patterns; wetting streaks
4.6	Nusil PLY7500 + HMDZ silica (3% TS530)	1000	1.0	2.6	7.6	0.52	10	obvious finer orange peel (similar to silicone without silica); good curtain stability -- better than formulations with unbound silica
4.7	Nusil PLY7500 + 3% TS530	1000	1.0	2.6	7.6	0.52	10	difficult to maintain a stable curtain; seashore coating pattern and dark silica agglomerates

As shown in Examples 4.1 and 4.2, addition of silicone or fluorine containing SAA's can induce severe patterning of the coating compared to Examples 2.10 and 3.10. Use of a leveling agent, such as Modaflow, can attenuate the patterns to show a brushstroke texture, matte or translucent coating (Examples 4.3 and 4.4). Increasing the concentration of Modaflow 2100 can lead to wetting streaks from the water carrier fluid dewetting and irregular coating patterns (Example 4.5). Including hydrophobic bound silica (for example hexamethyldisilazane *in situ* treated silica, Example 4.6) leads to a similar, fine orange peel pattern like Example 2.14 (which contains the same silicone without silica). Use of an HMDZ-*in situ* treated silica is preferred over unbound hydrophobic silica for the water carrier process, because the unbound silica gave a very unstable water curtain (Example 4.7). Water drainage patterns associated with the incorporation of SAA's (as illustrated in Examples 4.3 and 4.5) may be reduced or eliminated by using an air bar for water removal in the carrier fluid coating process set up (instead of relying solely on drainage).

#### Example 5

In addition to including a SAA in the formulation (or in the water curtain), the temperature of either the water or the silicone (or both) can be altered to change the surface tension. This is illustrated in Example 5 in Table 7 in which the water temperature was varied between 10 to 30 degrees C in a carrier fluid coating process. The functional layer formulation consisted of alkenyl functional silicone I. The coating substrate was clear polyester.

**Table 7: Modification of the Surface Tension of Water through Adjusting  
the Temperature of Fluid Carrier**

Ex	Viscosity (mPas)	Functional pump rate (mL/min)	Water Flow (L/min)	Web speed (m/min)	Thickness (microns)	Temp (C)	Coating Quality
5.1	450	1.0	2.2	7.6	0.52	10	orange peel
5.2	450	1.0	2.2	7.6	0.52	38	orange peel
5.3	450	1.0	2.2	15.3	0.26	38	finer orange peel
5.4	450	1.0	2.2	7.6	0.52	49	a little finer orange peel than control
5.5	450	1.0	2.2	15.3	0.26	49	air entrained
5.6	450	range	2.2	range	range	66	at all speeds and pump rates, the curtain was unstable; fine orange is the small amounts that could be coated; much turbulence and downweb chatter

Conditions were chosen to give an orange peel pattern at 10 degrees C for the control (Example 5.1). As the temperature was increased to 38 and 49 degrees C, a much finer pattern was achieved (Examples 5.3 and 5.4). At higher web speeds at 49 degrees C, air was entrained so a coating was not deposited (Example 5.5). At 66 degrees C, the curtain was unstable (Example 5.6), resulting in much turbulence and downweb chatter (or seashore patterns). However, we note that in coated portions of the web at 66 degrees C, the pattern size was very fine. A slot size larger than 0.51 mils and a higher flow rate may improve the stability of the curtain and make coating at this temperature possible.

10 We also note that with the present die design for carrier fluid coating process, heating the water also resulted in heating the silicone. The die could be redesigned to preferentially use temperature to alter the surface tension and viscosity of one phase relative to the second phase.

Coatings were also made on the bath coater at elevated temperatures. At 59 degrees C and 15 m/min, silicone formulation I was observed to "neck" into the water, rather than spreading evenly onto the polyester substrate. Addition of a SAA such as 0.5% BYK-358 caused the silicone to spread chaotically on the bath surface.

Examples 3, 4 and 5 illustrate a general approach for controlling patterns in coating processes using a fluid carrier, namely, modifying the surface tension of the water and/or oil phase in combination with process and formulation parameters (such as coating thickness, viscosity, etc.). Surface tension modifiers in these examples include (but are not limited to) SAA's (surfactants, wetting agents, leveling agents, particles, etc.) and temperature.

25 The invention is not limited to the above embodiments. The claims follow.

What is claimed is:

1. A method of making a patterned coating comprising the steps of:
  - (a) dispensing a composite comprising a carrier fluid layer and a functional fluid layer;
  - 5 (b) contacting the composite and a substrate;
  - (c) transferring the composite to the substrate, wherein interfacial interaction among the carrier fluid layer, the functional fluid layer, and the substrate generates a patterned coating of the functional layer on the substrate.
- 10 2. The method of Claim 1, further comprising the step (d) of removing the carrier fluid from the substrate.
3. The method of Claim 1, wherein the dispensing step (a) is selected from the group consisting of dip coating, bath coating, carrier fluid  
15 coating, multilayer curtain coating, multilayer extrusion die coating, roll coating, spray coating and drip coating.
4. The method of Claim 2, wherein the removing step (d) is selected from the group consisting of mechanical doctoring, gravity, centripetal  
20 removal, blowing, suction, solidification of carrier and doctoring, absorption into an absorptive material, gelation of carrier and doctoring, gelation of coating and doctoring, adsorption of carrier fluid, and evaporation.
5. The method of Claim 1, wherein the carrier fluid layer is not air.
- 25 6. The method of Claim 1, wherein the functional fluid layer is selected from the group consisting of a release material, an adhesive, a primer, and a low adhesive backsize material.

7. The method of Claim 2, further comprising the step (e) of post-processing the functional fluid layer on the substrate.

8. The method of Claim 7, wherein the post-processing is selected  
5 from the group consisting of drying to retain the pattern already formed in step (c), crosslinking, and separating the patterned coating from the substrate, and combinations thereof.

9. The method of any of Claims 1-8, wherein the substrate is  
10 selected from the group consisting of opaque, translucent, and clear substrates; low surface energy and high surface energy substrates; textured, patterned, rough, and smooth substrates; and combinations thereof.

10. The method of any of Claims 1-9, wherein the pattern is  
15 selected from the group consisting of inhomogeneity in thickness, spacial resolution and material composition, and combinations thereof across and down a substrate during the transferring step (c).

11. The method of Claim 10, wherein variation in the pattern is  
20 selected from the group consisting of random, symmetrical, periodic, gradual, irregular, circular, angular, non-angular, and combinations thereof.

12. The method of any of Claims 1-11, wherein the transferring  
step (c) results in a pattern having characteristics selected from the group  
25 consisting of matte finish, optical transmittance, roughness, porosity, image quality, controlled release, partial coating, and combinations thereof.

13. An article comprising a patterned coating on a substrate,  
prepared according to the method of any of Claims 1-12, wherein the article  
30 comprises a temporary electrographic image receptor, a release liner, a low-adhesive-backsize material, a differential release layer, a microporous membrane,

an adhesive tape, a high diffusion gradient functional layer, a filter, or a porous substrate surface modifier.

14. The article of Claim 13, wherein the electrographic image  
5 receptor comprises an electrophotographic image receptor.

15. The article of Claim 14, wherein the electrographic image  
receptor comprises an electrostatic image receptor.

10



FIG.1A



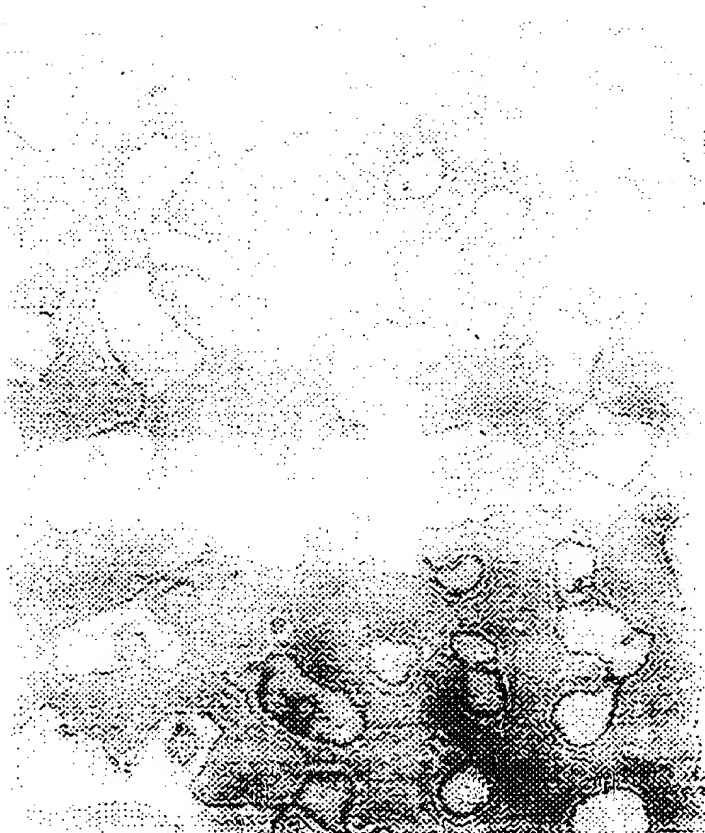


FIG.1B



FIG.1C

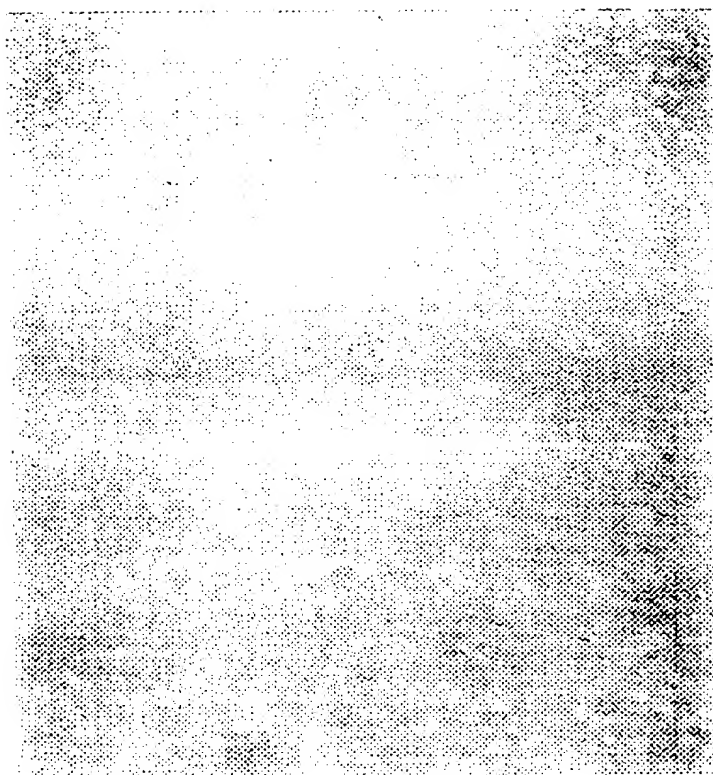


FIG.1D

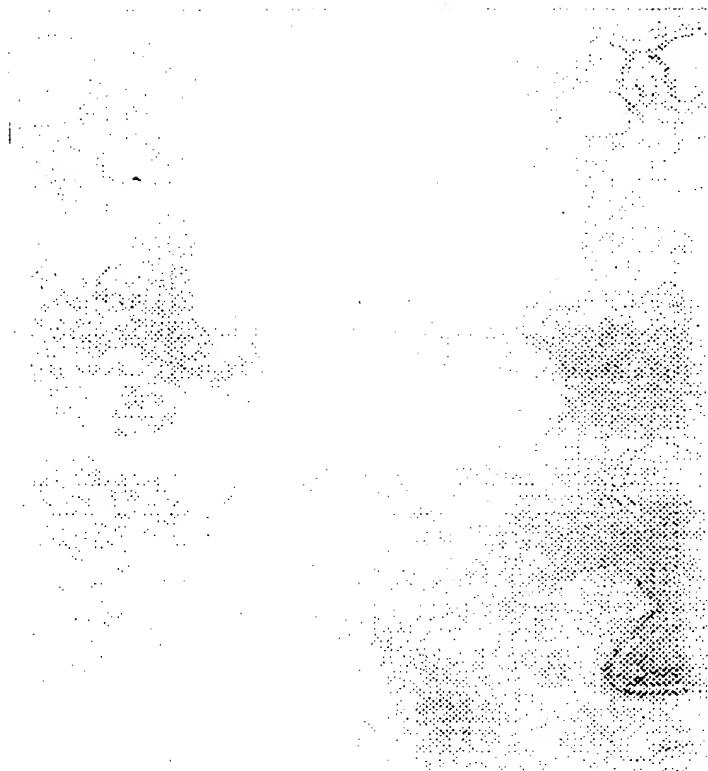


FIG. 2A



FIG. 2B

# INTERNATIONAL SEARCH REPORT

International Application No  
PCT/US 97/23813

**A. CLASSIFICATION OF SUBJECT MATTER**  
IPC 6 B05D1/00 B05D1/20 G03G7/00

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)  
IPC 6 B05D G03G

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 96 24088 A (MINNESOTA MINING & MFG) 8 August 1996 see the whole document ---	1-13
X	US 3 679 784 A (ROSENBERG KARL M) 25 July 1972 see the whole document ---	1-5, 7-11
X	GB 362 947 A (THE INDIA RUBBER, GUTTA PERCHA AND TELEGRAPH WORKS CO. LTD.) 11 December 1931 see the whole document ---	1-5, 9-11
X	GB 2 148 741 A (HUANG HONG BING; HSIAO WEN LANG) 5 June 1985 see the whole document ---	1-5, 7-11
	-/-	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

### \* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance  
"E" earlier document but published on or after the international filing date  
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)  
"O" document referring to an oral disclosure, use, exhibition or other means  
"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention  
"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone  
"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.  
"&" document member of the same patent family

Date of the actual completion of the international search

12 May 1998

Date of mailing of the international search report

20/05/1998

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Brothier, J-A

# INTERNATIONAL SEARCH REPORT

Inter. Appl. Application No.

PCT/US 97/23813

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	<p>US 5 348 766 A (LATHAM ELAINE) 20  September 1994  see the whole document</p>	1-5,7-11

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 97/23813

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9624088 A	08-08-1996	AU 4468096 A	21-08-1996
		CA 2209919 A	08-08-1996
		EP 0807279 A	19-11-1997
		US 5733608 A	31-03-1998
US 3679784 A	25-07-1972	NONE	
GB 362947 A		NONE	
GB 2148741 A	05-06-1985	NONE	
US 5348766 A	20-09-1994	NONE	